



www.teko-gmbh.com



RoxstaG6



Application



Hypermarkets /
Cash&Carry
up to 10,000 m²




MT cabinets
open: up to 300 m
closed: up to 600 m




LT shelf / island
up to 150 m
LT cold rooms

CO₂

Performance

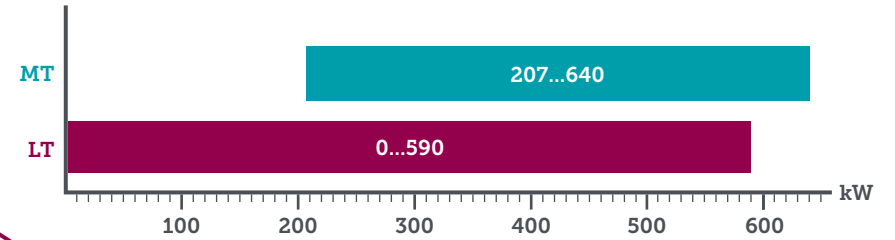

Quality

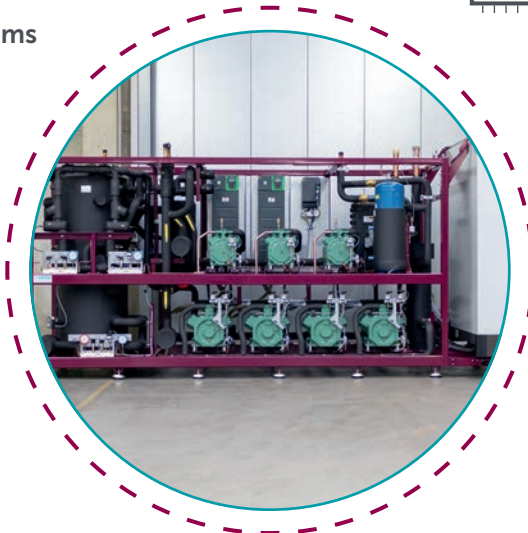


Details


- Trans- & subcritical application
- 3-7 MT / 0-6 LT – different versions for capacity control
- 6 cylinder compressors
- Receiver volume 250 / (2x)420 L
- TECO₂nditioner*
- Housing for outdoor installation*
- Parallel compression / EVALIFT / Ejector*
- Heat recovery including bypass*

* optional


Pressure levels



Suction line
(LT)



Suction line
(MT)



Medium
pressure



High
pressure