



www.teko-gmbh.com



**Roxsta**smart

## Application



Supermarkets  
up to 2,500m<sup>2</sup>




**MT cabinets**  
open: up to 100 m  
closed: up to 200 m




**LT shelf / island**  
up to 25 m  
**LT cold rooms**

**CO<sub>2</sub>**

## Performance

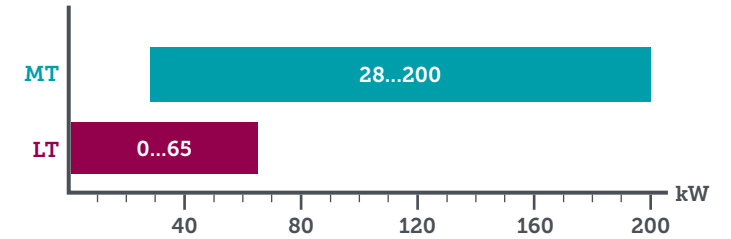

## Quality




## Details


- Trans- & subcritical application
- 3-4 MT / 0-3 LT – different versions for capacity control
- TECO<sub>2</sub>nditioner
- Active oil management
- Mounted water pump
- Receiver volume 165 / 197 / 380 L
- Housing for indoor & outdoor installation\*
- Parallel compression / EVALIFT / Ejector\*
- Heat recovery including bypass\*

\* optional


## Pressure levels



Suction line (LT)



Suction line (MT)



Medium pressure



High pressure